



DATE	REV	DESCRIPTION	BY	CHKD

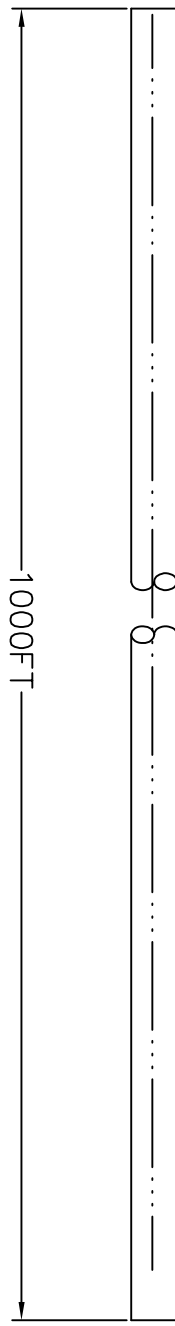


Marking: YFC CAT.6 26AWGX4PR SSTP IEC 60332.1 PATCH CABLE - CONFORM TO ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B-2-1 3P/ETL VERIFIED CM(UL) (CUL) CMH E164469-F3 XXXXXFT

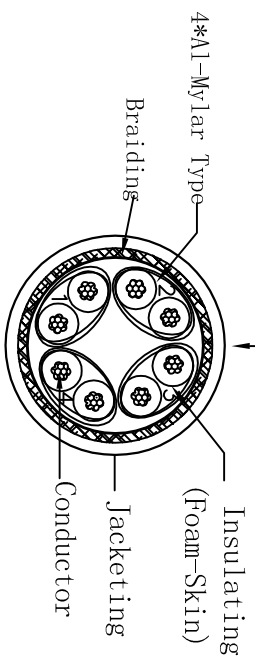

Conductor	Bare Copper 26AWG 70/159 ± 0.015mm
Insulation	Thickness: MIN at any point 0.2mm MAX AVG 0.3mm Diameter: 1.05 ± 0.05mm
Jacketing PVC	Thickness: MIN at any point 0.6mm MAX AVG 0.58mm Diameter: 6.1 ± 0.2mm

WIRE	CAT. 6 SSTP STR 26AWG
PLUG	
LENGTH	1000FT
COLOR	



1R/1000FT

orange 1 white	green 2 white
blue 3 white	brown 4 white

Unless specified on the drawing, tolerances are per the follows:

.X	± 1
.XX	± 0.2
.XX	± 0.05



3RD	MM	SHEET	1	OF	1
DRAW. NO	DEPARTMENT	SCALE	UNIT	ITEM	DATE
				RAW	2006/9/04
				CHECKER	APPROVAL