


Specification:

Material :

1. Panel : 1.6 m/m SPCC with Black color painting.
2. RJ45 Housing : PBT, UL 94V-0.
3. RJ45 Contact material & finished :
3-1. Phosphor Bronze with 50-60 micro-inch Nickel plated.
3-2. Contact area : Min. 3 mm 50 micro-inch Gold plated.
4. IDC Housing : PC, UL 94V-2.
5. IDC Terminal material & finished :
5-1. Phosphor Bronze with 50 micro-inch Tin-Lead plated over 50-60 micro-inch Nickel plated.
5-2. 110 & Krone tool compatible.
- 5-3. Use for 22-26 AWG stranded and solid wire.
6. Jack Bracket Set : ABS UL 94V-0, Black color.
7. Cable Holder : Nylon 66, UL 94V-0.

Performance :

- a. The IDC color codes combine two wirings of T568A & T568B.
- b. Insertion Force : 900 gms for 8 contacts.
- c. Retention Strength : 7.7 kgs between Jack and Plug.
- d. Operation Temperature : -40°C to 80°C.
- e. Durability :
e-1. Jack : 750 cycles Plug-Jack mating and unmating test, Insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
e-2. IDC : Max. 200 punching times.
- f. The Cat.5e performance is in compliance with the ANSI/TIA/EIA 568 B.2 standard.

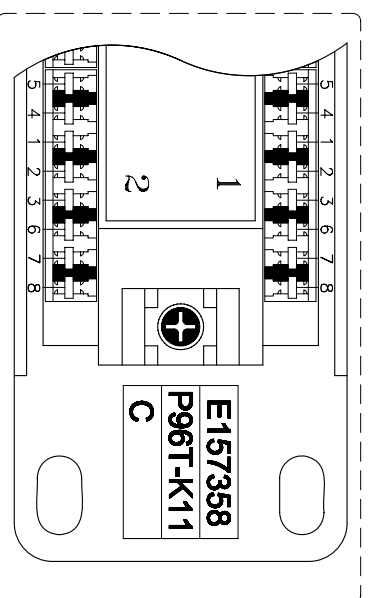

| | | | |
|------------------------|-----|--|--|
| | | | |
| UNIT | M/M | CHK | |
| SCALE | 1/4 | APPR | |
| ITEM NO: 102205 | | 96port 180 degree 110 type 568B wiring BLACK Color | |
| DWG NO: 102205 | | | |