
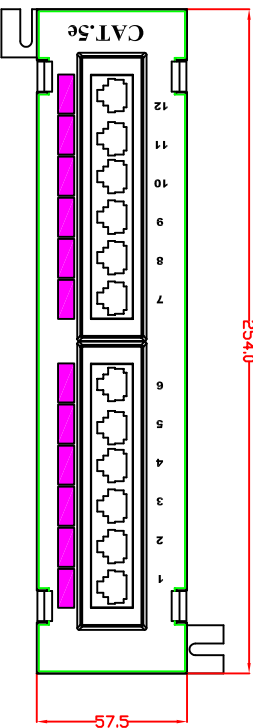
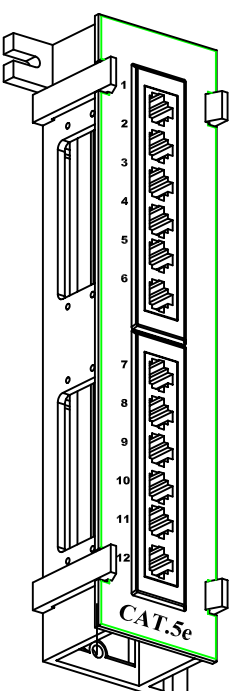

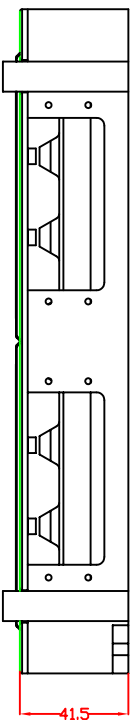


DATE	REV.	REVISION	DRAFTING	CHECKED
06.09.14	A/0	NEW	湯欣之	

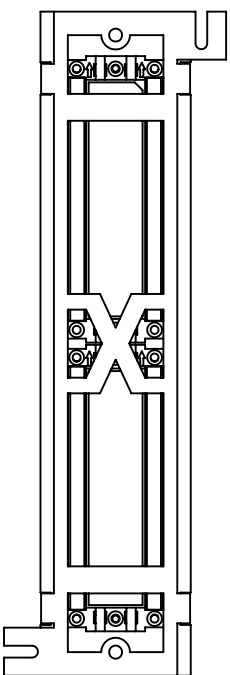

Materials:
 Plastic Body: Fireproof ABS UL-94V0
 RJ-45 Jack: Housing-Nylon 8p8c 50micro inches gold plated
 PCB : FR4/1.6mm UL-94-V0
 IDC Body: Fireproof pc UL-94-V0
 IDC Pin: Bronze&Tinned
 IDC Description: For 22-26 AWG
 For 110 or Krone punch-down Tool

Mechanical Specifications:
 IDC Punch Down Cycle: Over 250 Cycles(min)
 RJ-45 Jack Insertion Cycle: Over 750 Cycles(min)
 Operation Temperature: -40~+70°

Unless specified on the drawing, tolerances are per the follows:

. ±1
 .X ±0.2
 .XX ±0.05



Material	Part Number	102201	Note	3RD	UNIT	mm	SHEET	1 OF 1
				UNLESS SPECIFIED ON THE DRAWING, TOLERANCES ARE PER THE FOLLOWS:				
				±1				
				±0.2				
				±0.05				
					DRAW.NO	0413-1	DESC.	Cat.5e Unshielded 12Port Vertical Mdf Panel
					DEPARTMENT		DRAW	湯欣之
					SCALE	1:1	APPROVED	DATE 2006.09.14
					UNIT	mm	SHEET	1 OF 1