
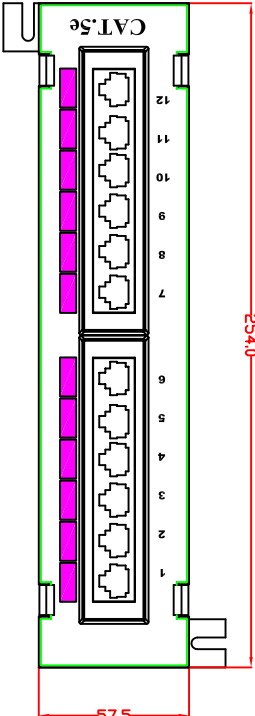
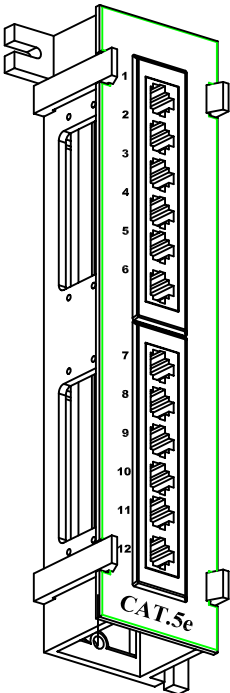

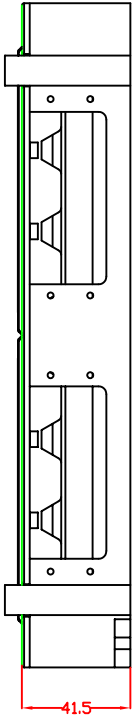


DATE	REV.	REVISION	DRAFTING	CHECKED
06.09.14	A/0	NEW	湯欣之	

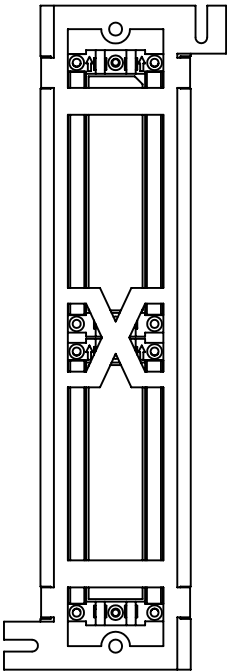

Materials:
Plastic Body: Fireproof ABS UL -94V0
RJ-45 Jack: Housing-Nylon 8p8c 50micro inches gold plated
PCB : FR4/1.6mm UL -94-V0
IDC Body: Fireproof pc UL-94-V0
IDC Pin: Bronze&Tinned
IDC Description: For 22-26 AWG
For 110 or Krone punch-down Tool

Mechanical Specifications:
IDC Punch Down Cycle: Over 250 Cycles(min)
RJ-45 Jack Insertion Cycle: Over 750 Cycles(min)
Operation Temperature: -40-+70°

Unless specified on the drawing, tolerance are per the follows:

. ±1
.X ±0.2
.XX ±0.05

RJ-45 Jack Insertion Cycle: Over 150 Cycles(mm) Operation Temperature: -40~+70°												
Material	Part Number	102201	Note		Unless specified on the drawing, tolerances are per the follows: · ± 1 · .X ± 0.2 · .XX ± 0.05 							
							DRAW/NO	0413-1	DESC.	Cat.5e Unshielded 12Port Vertical Mini Panel		
							DEPARTMENT		DRAW	湯欣之	DATE	2006.09.14
							SCALE	1:1	APPROVED		DATE	
							UNIT	mm	SHEET	1 OF 1		