


DATE	REV.	REVISION	DRAFTING	CHECKED
06/09/19	A/0	NEW	湯欣之	

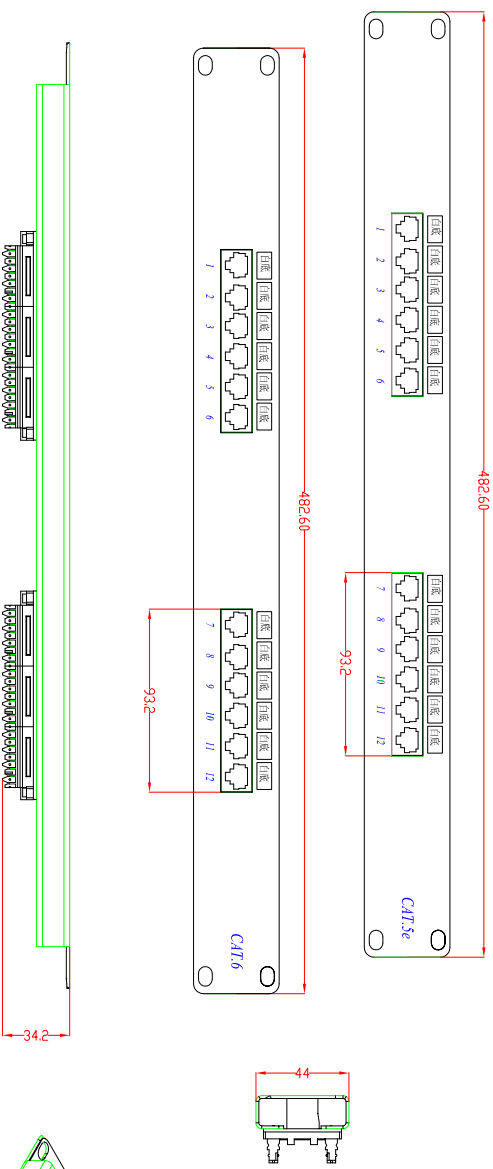


Specification

1. Patch Panel: Case, metal 1U.
2. RJ45 Jack---Body: PC UL94V-0 rated, Black color.
Contact: Phosphor Bronze, 50u" gold plated
Tin-lead over nickle in contact area
3. Connector: 110 Connector---Body: PC UL94V-0, White color.
Contact: Phosphor Bronze with Tin plated.
4. P.C.Board: FR4, 1.6mm Double side, UL 94V-0.
5. Operation Temperature : 0°C to 80°C.
6. Insertion Force: 900gms for 8 contacts.
7. Retention Strength : 7.7 kgs between jack and plug.
8. Durability : 750 Cycles contact resistance test check every 100 Cycles.
Insertion cycles at 20 cycles/minute max.
9. Certifications: ETL verify ;UL listed ; ANS/ITIA/EIA-568-B-2; ISO/IEC 11801 Classe F; FCC.

Color Coding Information

IDC terminal	color code	IDC terminal	color code
PIN.5	WHITE/BLUE	PIN.5	WHITE/BLUE
PIN.4	BLUE	PIN.4	BLUE
PIN.1	WHITE/ORANGE	PIN.1	WHITE/GREEN
PIN.2	ORANGE	PIN.2	GREEN
PIN.3	WHITE/GREEN	PIN.3	WHITE/ORANGE
PIN.6	GREEN	PIN.6	ORANGE
PIN.7	WHITE/BROWN	PIN.7	WHITE/BROWN
PIN.8	BROWN	PIN.8	BROWN

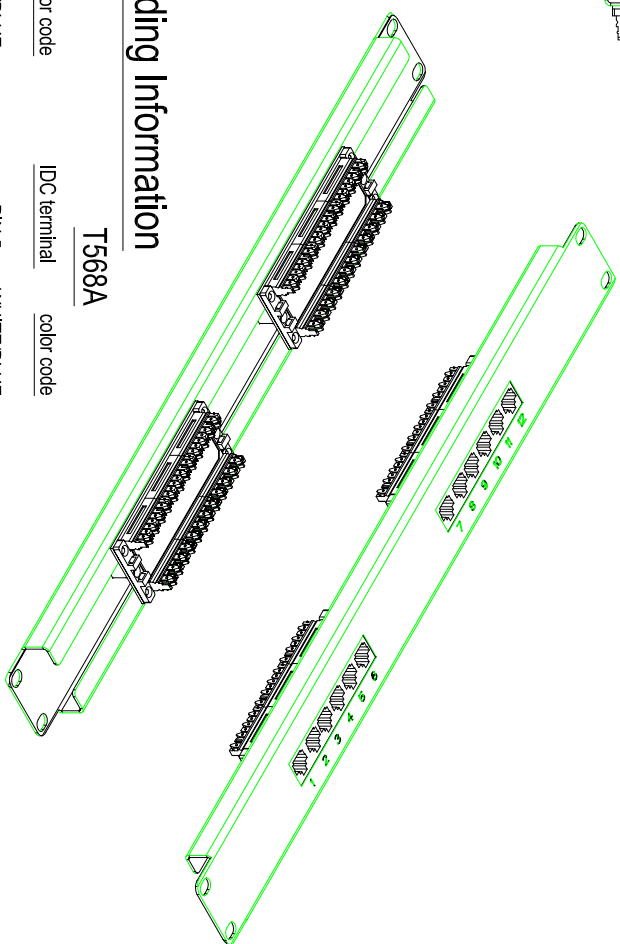

Material	SECC	Part Number	102202 102207	Note	3RD
<p>Unless specified on the drawing, tolerances are per the follows:</p> <p>. ±1 .X ±0.2 .XX ±0.05</p>					

DRAW.NO	DESC.	C:\6\Cat6 UTP patch panel 12port(110)规格图
DEPARTMENT	DRAW	湯欣之
SCALE	1:1	DATE
UNIT	mm	APPROVED
		SHEET
		1 OF 1