DATE	REV.	REVISION	DRAFTING	CHECKED
06. 09. 14	A/0	NEW	湯欣之	

Cat.5e Keystone



Cat.6 Keystone













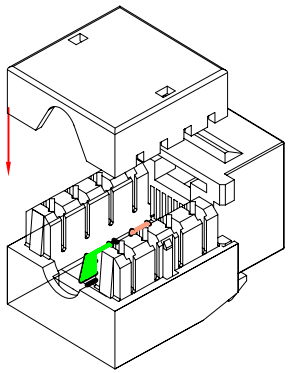

SPECIFICATION

1、 Housing material: PC UL 94V-0 rated，Insert material: PC UL 94V-0 rated.
Contact Finished: 50 micro-inch gold over, Nickel 50-60 micro-inch.
2、IDC Housing: PC UL 94V-0 white color.
IDC Terminal: Phosphor Bronze, nickel plated 50-60 micro-inch.
3、Jack Housing Color: Black
4、P.C.B: FR4 1.6m/m thickness, 2 layers.
5、I.D.C CAP: PC UL 94V-0 white color.
6、Certifications: ETL component ;UL listed ; ANSI/TIA/EIA-568-B.2; ISO/IEC 11801 ClassE;FCC.
7、Supports: Dual T568A & T568B wiring compatible with Category 5 enhanced requirement.
8、Tool：Krone、AT&T（110 Type）.
9、Optional Parts：Dust cover.

Color Colding Information

T568B		T568A	
IDC terminal	color code	IDC terminal	color code
PIN.5	WHITE/BLUE	PIN.5	WHITE/BLUE
PIN.4	BLUE	PIN.4	BLUE
PIN.1	WHITE/ORANGE	PIN.1	WHITE/GREEN
PIN.2	ORANGE	PIN.2	GREEN
PIN.3	WHITE/GREEN	PIN.3	WHITE/ORANGE
PIN.6	GREEN	PIN.6	ORANGE
PIN.7	WHITE/BROWN	PIN.7	WHITE/BROWN
PIN.8	BROWN	PIN.8	BROWN

Uneless specified on the drawing,tolerancese are per the follows:
. ±1
.X ±0.2
.XX ±0.05

DRAW.NO		DESC.	Cat.5e/Cat.6 90°Unshielded Keystone Jack black		
DEPARTMEN	PM	DRAW	湯欣之	DATE	06.09.14
SCALE		APPROVED		DATE	
UNIT	mm	SHEET	1 OF 1		

Material		Part Number	101603 101703	Note		3RD	