


HDMI-19M/HDMI-19M.

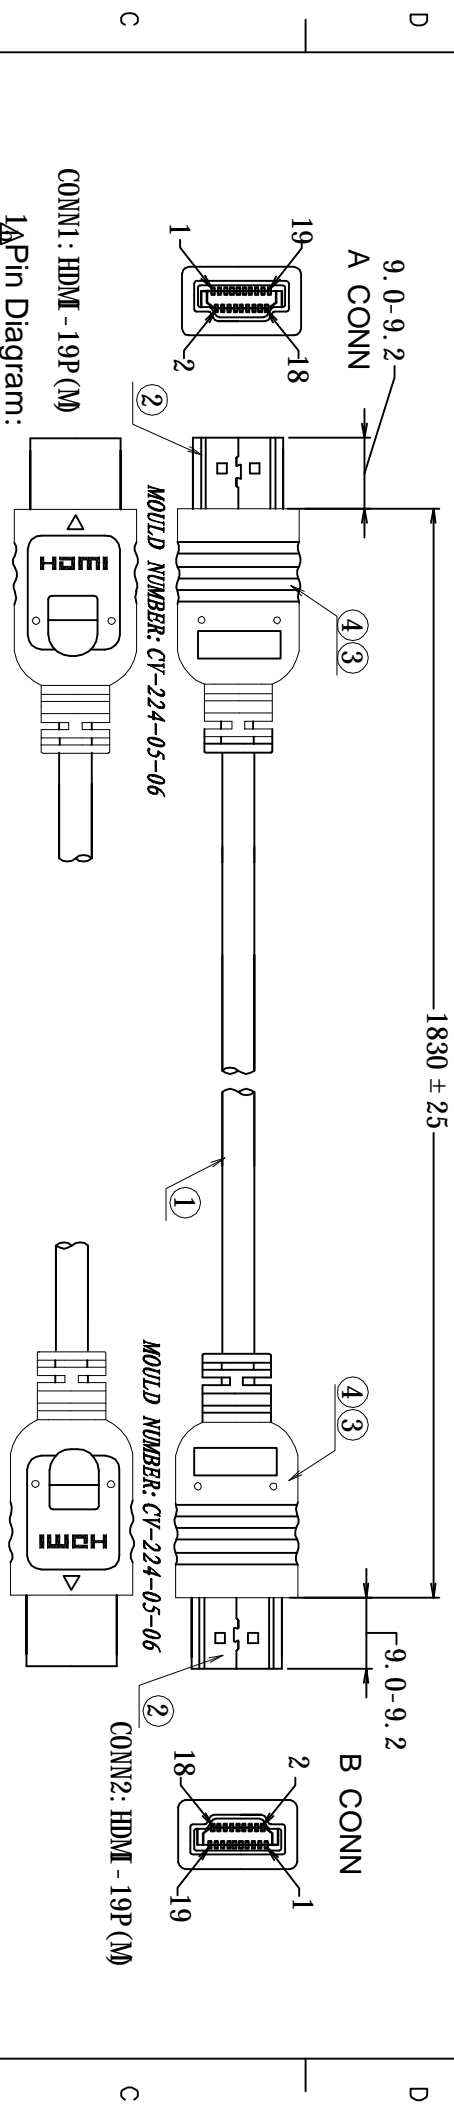

CONN1: HDMI-19P (M)
19Pin Diagram:

CONN1	CONN2	CONN1	CONN2
1	white	10	white
2	red	11	green
3	ground	12	ground
4	white	13	white
5	brown	14	black
6	ground	15	ground
7	white	16	white
8	blue	17	yellow
9	ground	18	orange
10	ground	19	red
11	ground	20	red
12	ground	21	red
13	ground	22	red
14	ground	23	red
15	ground	24	red
16	ground	25	red
17	ground	26	red
18	ground	27	red
19	ground	28	red
20	ground	29	red
21	ground	30	red
22	ground	31	red
23	ground	32	red
24	ground	33	red
25	ground	34	red
26	ground	35	red
27	ground	36	red
28	ground	37	red
29	ground	38	red
30	ground	39	red
31	ground	40	red
32	ground	41	red
33	ground	42	red
34	ground	43	red
35	ground	44	red
36	ground	45	red
37	ground	46	red
38	ground	47	red
39	ground	48	red
40	ground	49	red
41	ground	50	red
42	ground	51	red
43	ground	52	red
44	ground	53	red
45	ground	54	red
46	ground	55	red
47	ground	56	red
48	ground	57	red
49	ground	58	red
50	ground	59	red
51	ground	60	red
52	ground	61	red
53	ground	62	red
54	ground	63	red
55	ground	64	red
56	ground	65	red
57	ground	66	red
58	ground	67	red
59	ground	68	red
60	ground	69	red
61	ground	70	red
62	ground	71	red
63	ground	72	red
64	ground	73	red
65	ground	74	red
66	ground	75	red
67	ground	76	red
68	ground	77	red
69	ground	78	red
70	ground	79	red
71	ground	80	red
72	ground	81	red
73	ground	82	red
74	ground	83	red
75	ground	84	red
76	ground	85	red
77	ground	86	red
78	ground	87	red
79	ground	88	red
80	ground	89	red
81	ground	90	red
82	ground	91	red
83	ground	92	red
84	ground	93	red
85	ground	94	red
86	ground	95	red
87	ground	96	red
88	ground	97	red
89	ground	98	red
90	ground	99	red
91	ground	100	red

- Electricity testing:
- A. Voltage: DC 300V/10ms
- B. Insulation Resistance: $\geq 10M\Omega$
- C. Conduct Resistance: $\leq 3\Omega$

P/N	Name	HDMI-19M/HDMI-19M
181266		

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
①	Wire	UI202766 [IP*30#(7/0.10TA)+D(7/0.10TA)+AL+MI*5C+30#(7/0.10TA)*5C+AL+D(7/0.10TA)+B(50%AL+B HDMI VI.4 OD:7.3 Black L=1830 (RoHS)	1	PC
②	Conn	HDMI-19P (M) Golden Plated (RoHS)	2	PCS
③	Internal model	Transparents PE (RoHS)	4.4	g
④	External Model	45P Black PVC (RoHS)	15.2	g
⑤	Sticker	Sticker: 26*12mm(RoHS)	1	PC
⑥	Tie	L=100 Black (RoHS)	2	PCS
⑦	Bag	7" x 10" PE Bag (RoHS)	1	PC
⑧	Waterproof Bag	(20*16) "28" Bag(RoHS)	1/80	PC
⑨	Box	48 x 40 x 20cm (RoHS)	1/80	Box