



HDMI-19M/HDMI-19M.

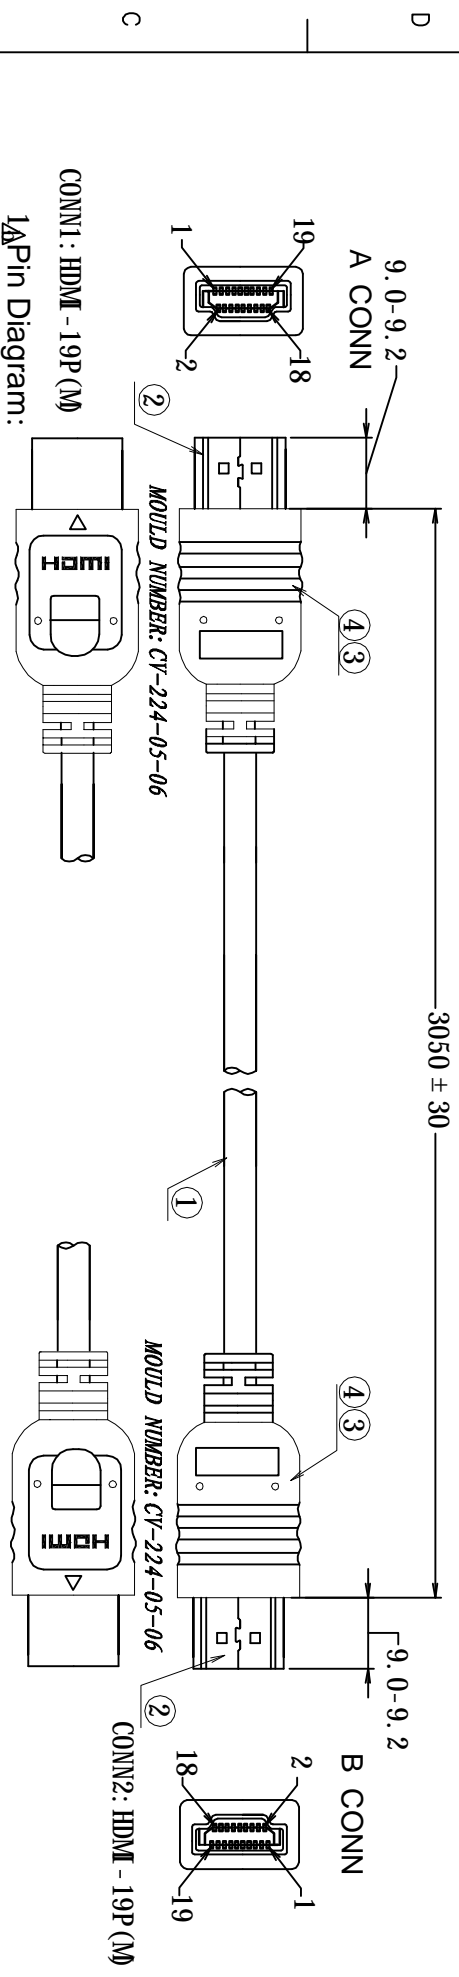

1APin Diagram:

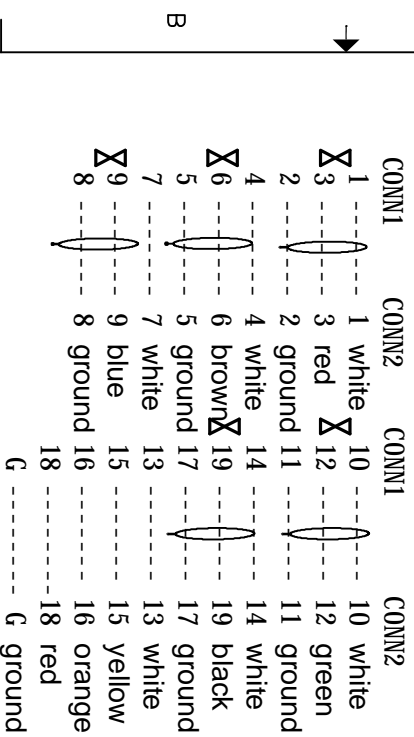

- Electricity testing:
- A. Voltage: DC 300V/10ms
- B. Insulation Resistance: $\geq 10M\Omega$
- C. Conduct Resistance: $\leq 3\Omega$

P/N	Name	HDMI-19M/HDMI-19M
181267		

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
①	Wire	UI2027661P*30#(7/0, 10TA)+D(7/0, 10TA)+AL+MI*5C+30#(7/0, 10TA)*5C+AL+D(7/0, 10TA)+B(50 % AL B HDMI VI. 4 0D: 7.3 Black L=3050 (RoHS)	1	PC
②	Conn	HDMI-19P (M) Golden Plated (RoHS)	2	PCS
③	Internal model	Transparents PE (RoHS)	4.4	g
④	External Model	45P Black PVC (RoHS)	15.2	g
⑤	Sticker	Sticker: 26*12mm(RoHS)	1	PC
⑥	Tie	L=120 Black (RoHS)	2	PCS
⑦	Bag	7" x 10" PE Bag (RoHS)	1	PC
⑧	Waterproof Bag	(20*16) "28" Bag(RoHS)	1/50	PC
⑨	Box	48 x 40 x 20cm (RoHS)	1/50	Box