



HDMI-19M/HDMI-19M.

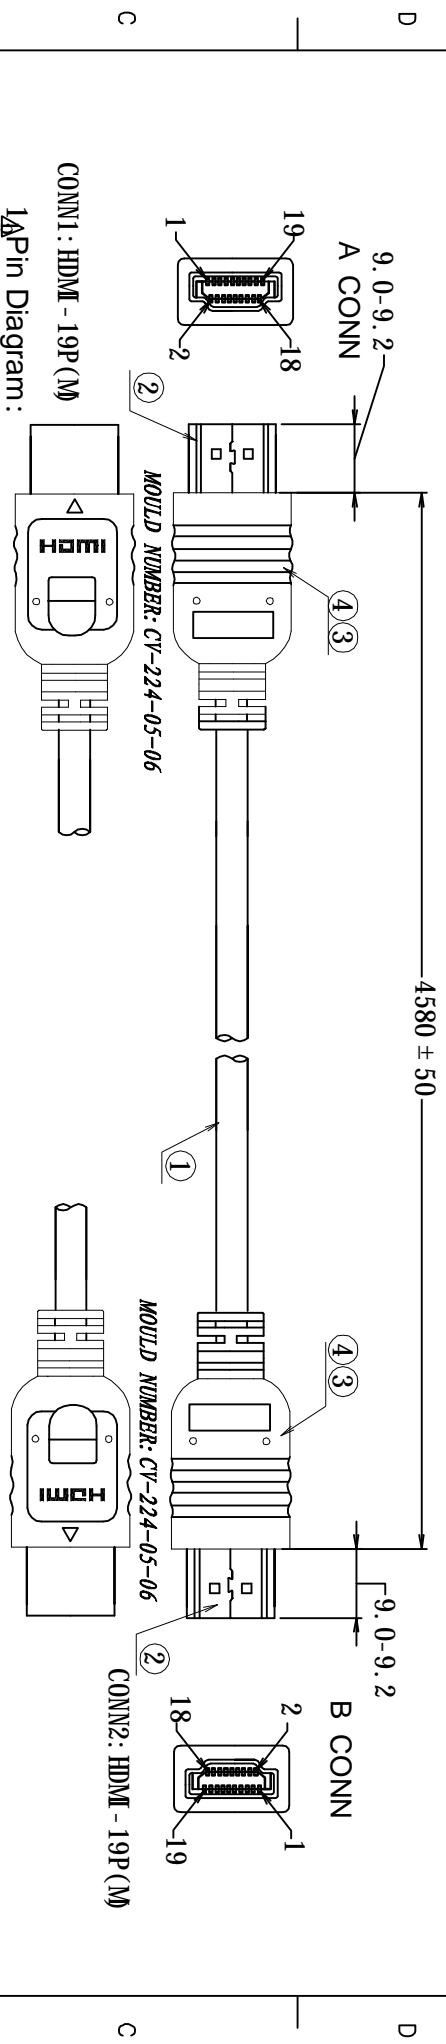

1. Pin Diagram:

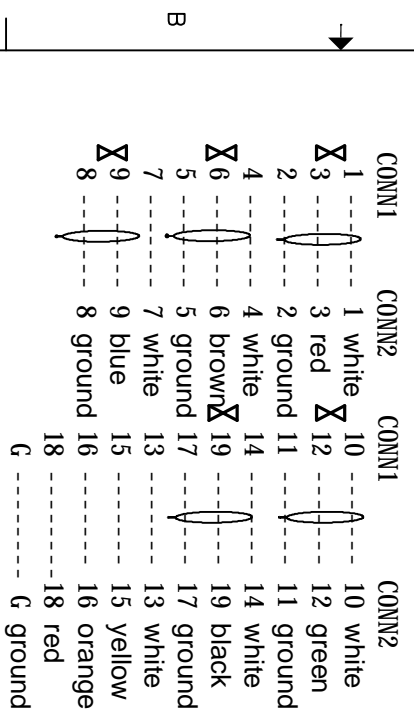

- Electricity testing:
- A. Voltage: DC 300V/10ms
- B. Insulation Resistance: $\geq 10M\Omega$
- C. Conduct Resistance: $\leq 3\Omega$

P/N	Name	HDMM-19M/HDMM-19M
181268		

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
①	Wire	UL2027/6 1P*30#(7/0-10TA)+D(7/0-10TA)+AL+M*5C+30#(7/0-10TA)*5C+AL+D(7/0-10TA)+B(50% AL B HDMI VI.4 OD: 7.3 Black L=4580(rohs)	1	PC
②	Conn	HDMI-19P(M) Golden Plated (RoHS)	2	PCS
③	Internal model	Transparents PE (RoHS)	4.4	g
④	External Model	45P Black PVC (RoHS)	15.2	g
⑤	Sticker	Sticker: 26*12mm(RoHS)	1	PC
⑥	Tie	L=130 Black (RoHS)	2	PCS
⑦	Bag	9" x 12" PE Bag(RoHS)	1	PC
⑧	Waterproof Bag	(20*16) "28" Bag(RoHS)	1/40	PC
⑨	Box	48 x 40 x 20cm (RoHS)	1/40	Box