


HDMI-19M/HDMI-19M.

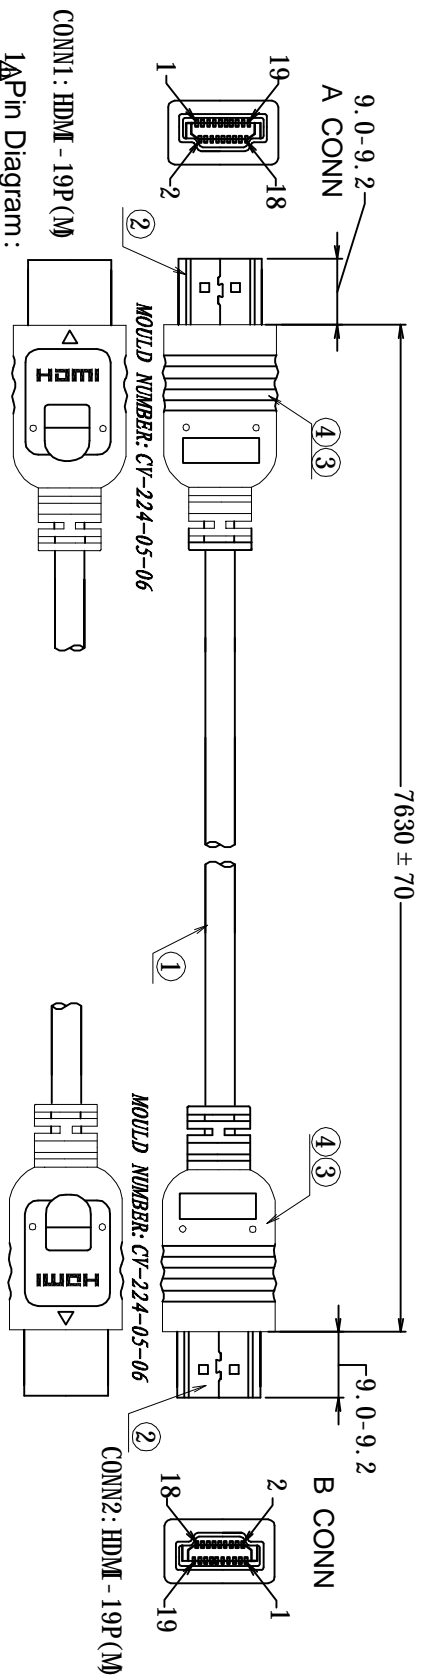

2. Electricity testing:
 A. Voltage: DC 300V/10ms
 B. Insulation Resistance: $\geq 10M\Omega$
 C. Conduct Resistance: $\leq 3\Omega$

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
①	Wire	UL20276(1P*28#(7/0, 127TA)+AE(7/0, 127TA)+MALAR)*5C+28#(7/0, 127TA)*4C+MALAR+AE(7/0, 127TA)+B(50 % AL B) HDMI V1.4 0D: 7.3 Black L=7630(RoHS)	1	PC
②	Conn	HDMI -19P (M) Golden Plated (RoHS)	2	PCS
③	Internal model	Transparents PE (RoHS)	4.4	g
④	External Model	45P Black PVC (RoHS)	15.2	g
⑤	Sticker	Sticker: 28*12mm(RoHS)	1	PC
⑥	Tie	L=150 Black (RoHS)	2	PCS
⑦	Bag	10" * 12" PE Bag (RoHS)	1	PC
⑧	Waterproof Bag	(20*16) "28" Bag (RoHS)	1/24	PC
⑨	Box	48 * 40 * 20cm (RoHS)	1/24	Box

P/N	Name	HDMI - 19M/HDMI - 19M
181270		