



DATE	REV	DESCRIPTION	BY	CHKD

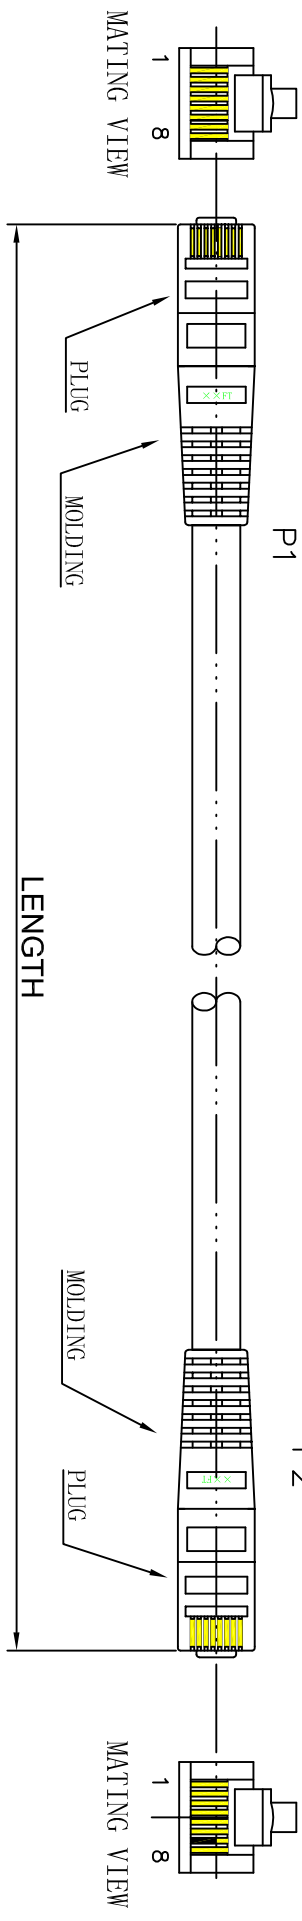


Marking: YFC CAT. 6 UTP ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2-1 ETL/3P VERIFIED - 24AWGX4P
 PATCH TYPE CM (UL) C(UL) CMH E164469-F3

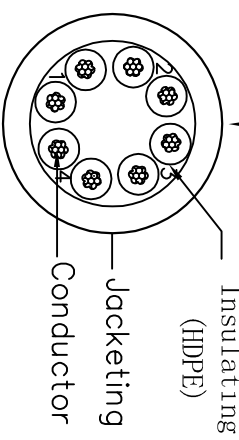

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

Conductor	Bare Copper 24AWG 7/0.196±0.015mm
Insulation	Thickness:MIN at any point:0.15mm MAX:AVG:0.25mm Diameter:1.04±0.06mm
Jacketing PVC	Thickness:MIN at any point:0.46mm MAX:AVG:0.55mm Diameter:5.9±0.15mm

WIRE	CAT6 UTP STR 24AWG
PLUG	YUS-04
Length	X X M
WIRE COLOR	X

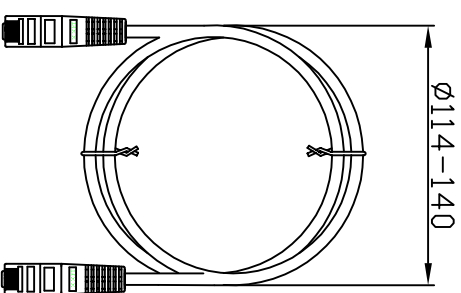

Unless specified on the drawing, tolerances are per the follows:

.X	± 1
.XX	± 0.2
.XXX	± 0.05

PA/R	PINOUT	
	WIRE	WIRE
1	1 WHT/ORG	P2 (T568B) 1
	2 ORG	P1 (T568B) 2
2	3 WHT/GRN	P2 (T568B) 3
	6 GRN	P1 (T568B) 6
3	4 BLU	P2 (T568B) 4
	5 WHT/BLU	P1 (T568B) 5
4	7 WHT/BRN	P2 (T568B) 7
	8 BRN	P1 (T568B) 8

3RD	UNIT	MM	SHEET	1	OF	1
	DRAW. NO	YUS-04	ITEM	CAT.6 UTP 24AWG*4P		
	DEPARTMENT		DRAW	SWH	DATE	2006/08/29
	SCALE		CHECKER		APPROVAL	