

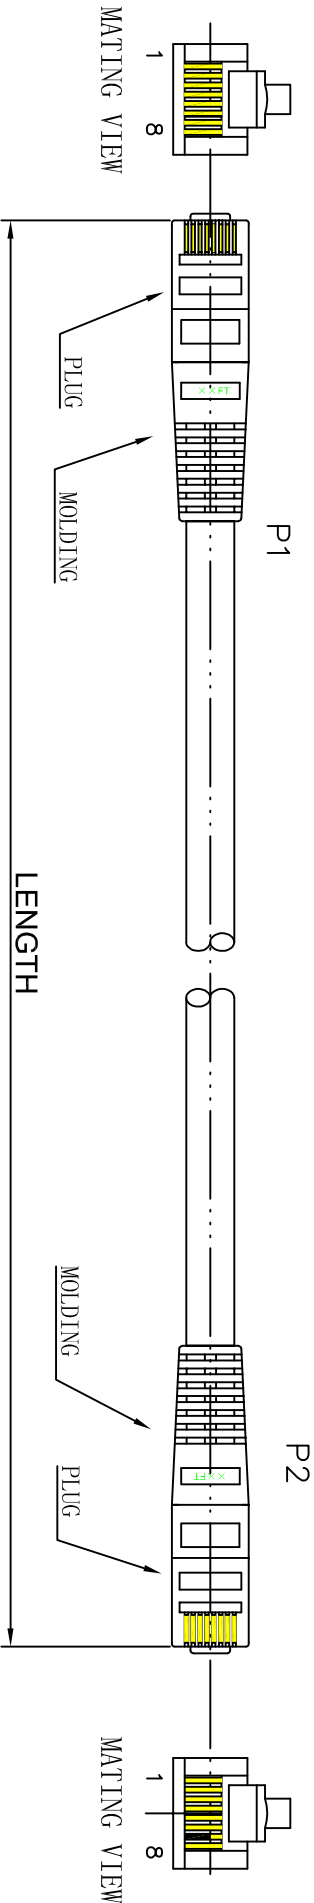


DATE	REV	DESCRIPTION	BY	CHKD




Marking: YFC UTP CAT.5E 350MHZ PATCH ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2 3P VERIFIED FOR GIGABIT
ETHERNET 24AWGX4P TYPE CM (UL) C(UL) CMH E164469-F3

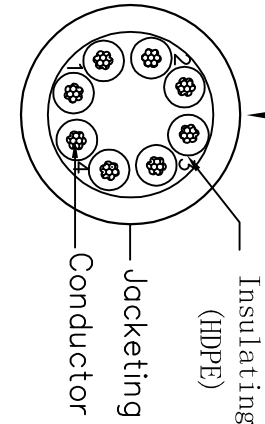

orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

Conductor	Bare Copper 24AWG 70L196±0.015mm
Insulation	Thickness:MIN at any point0.15mm MAX AVG0.25mm Diameter:0.98±0.06mm
Jacketing PVC	Thickness:MIN at any point0.42mm MAX AVG0.48mm Diameter:5.4±0.2mm

WIRE	CAT.5E UTP STR 24AWG
PLUG	YUS-04
Length	× × FT
WIRE COLOR	

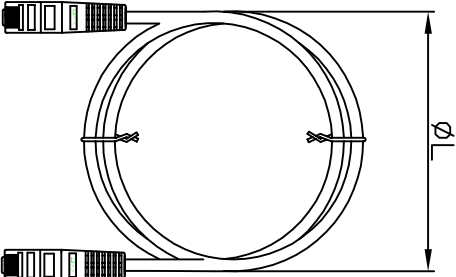

Unless specified on the drawing, tolerances are per the follows:

± 1
± 0.2
± 0.05

DRAW. NO	YUS-04	ITEM	CAT.5E UTP STR 24AWG		
DEPARTMENT		DRAW	SWH	DATE	2006/08/29
SCALE		CHECKER		APPROVAL	
UNIT	MM	SHEET	1	OF	1