

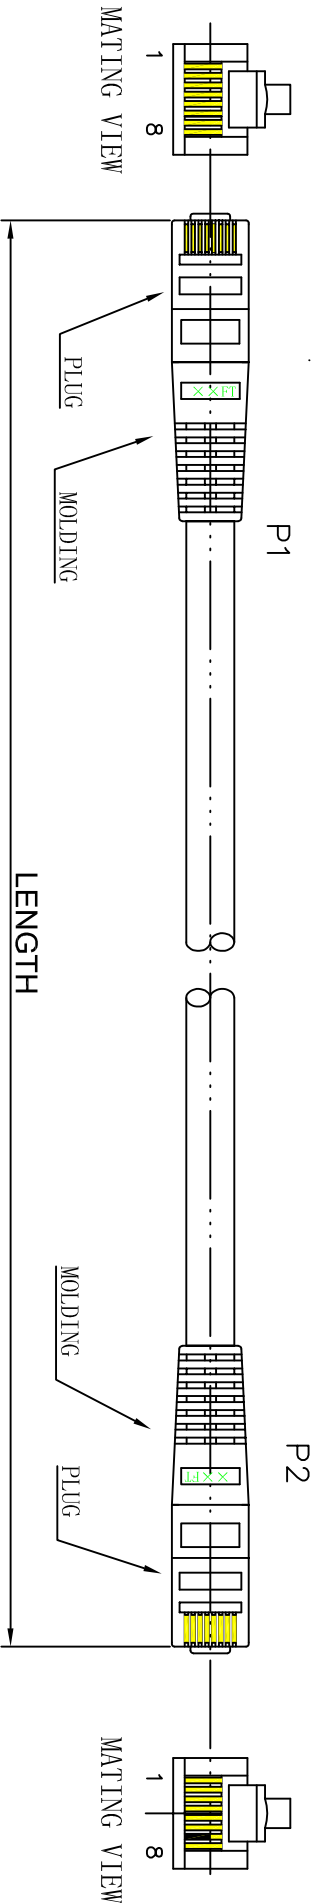


DATE	REV	DESCRIPTION	BY	CHKD




Marking: YFC FTP CAT.5E 350MHZ PATCH ISO/IEC 11801 & EN 50288 3P VERIFIED FOR GIGABIT
ETHERNET 26AWGX4P TYPE CM (UL) CMH E164469-F3

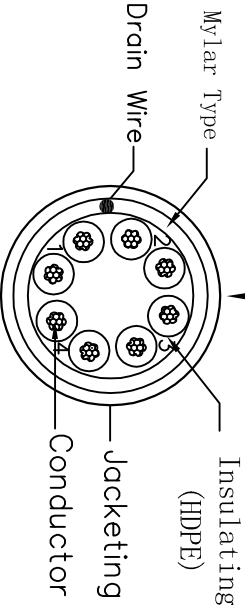

Conductor	Bare Copper 26AWG 7/0.16±0.015mm
Insulation	Thickness:MIN at any point0.15mm MAX AVG0.25mm Diameter0.32±0.06mm
Jacketing	PVC Thickness:MIN at any point0.50mm MAX AVG0.60mm Diameter5.6±0.2mm

WIRE	CAT.5E FTP STR 26AWG
PLUG	YUS-04
Length	XXFT
WIRE COLOR	X

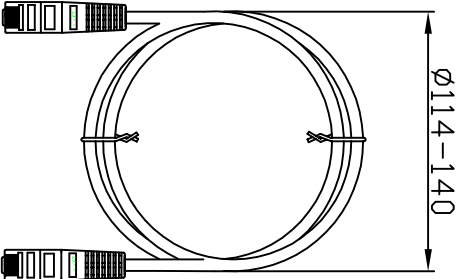

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

Unless specified on the drawing, tolerances are per the follows:

.X	± 1
.XX	± 0.2
.XX	± 0.05

PINOUT				
PA/R	P1 (T568B)	WIRE	P2 (T568B)	
1	1	WHT/ORG	1	
	2	ORG	2	
	3	WHT/GRN	3	
2	6	GRN	6	
	4	BLU	4	
	5	WHT/BLU	5	
3	7	WHT/BRN	7	
	8	BRN	8	

3RD				
Unless specified on the drawing, tolerances are per the follows:				
.X ± 1				
.XX ± 0.2				
.XX ± 0.05				
DRAW .NO YUS-04				
DEPARTMENT				
SCALE				
UNIT MM				
SHEET				
1 OF 1				