


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD





**PLUG MARKING:**

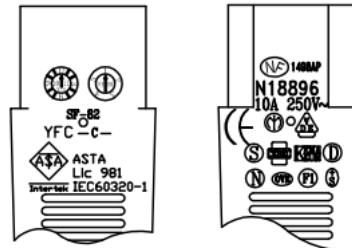

△ 1830±20

**REVISION INFORMATION**

Rev.	Rev. Date	Modified By	Brief Description

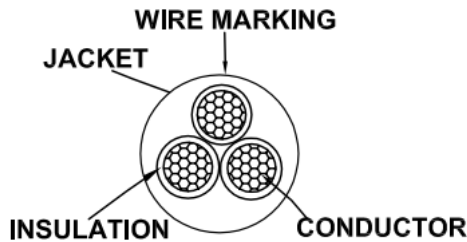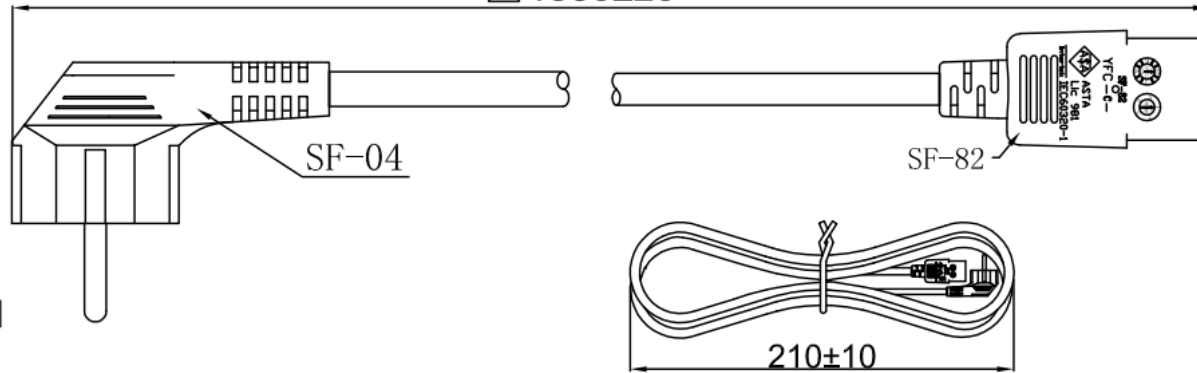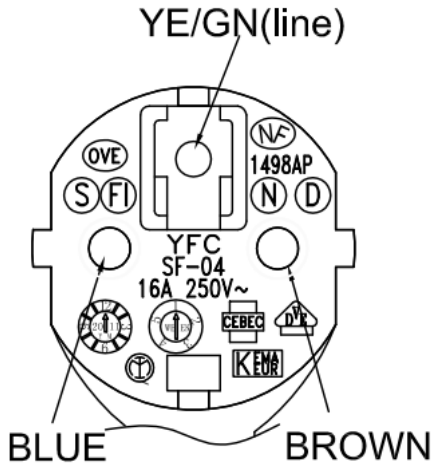

<b>WIRE MARKING:</b> (Hollow)		+ S + S + S KEMA-KEUR (OVE) (S) (N) (D) (FI) △ CEBEC 972 <VDE> NF-USE 1345 IEMMEQU H05VV-F 3G0.75MM <sup>2</sup> V-75 300/500V ORDINARY DUTY NSW17436					
Conductor		Insulation			Jacket		Overall diameter
mm <sup>2</sup>	Resistance maximum (≤)	Min.Thick	Diameter	Length of Lay	Min.Thick	AVG.Thick	
0.75 (24/0.190)	at20°C ≤26.0ohms/km	0.44mm	2.4±0.1mm	130↓mm	0.58mm	0.8mm	6.8±0.1mm
(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)							

**ELECTRIC TESTING:**

1. 100% OPEN & SHORT TESTING .
2. VOLTAGE RATING:AC ≥1500V/S
3. PLUG(SF-04) RATED POWER:250V 10A
4. PLUG(SF-82) RATED POWER:250V 10A
5. WIRE: H05VV-F 3X0.75 RATED POWER:300/500V
- 6.COLOR:BLACK

DATE: 2012/04/18	DESCRIPTION:		
SHEET 1 of 1	ITEM NO.		
SCALE	REV. 00	UNIT: mm	